




■ 外形图 Outline Drawing

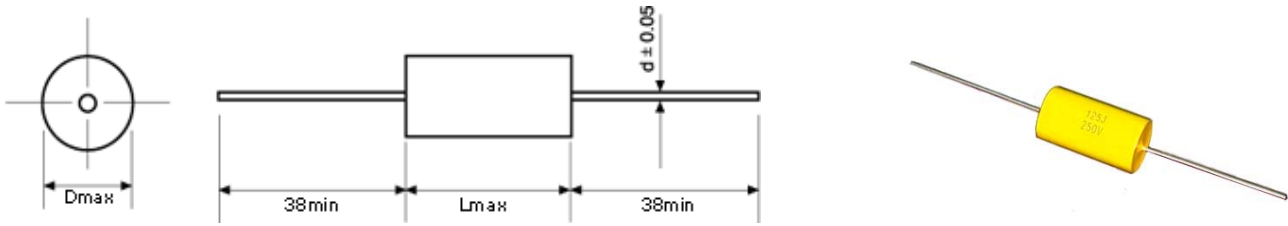

■ 特点

- 体积小, 重量轻, 自愈性能优异
- 外包聚脂胶带纸, 两端灌注环氧树脂

■ Features

- Small size, light weigh, excellent self-healing property
- Wrapped with polyester adhesive tape and ends filled with epoxy resin

■ 技术要求 Specifications

引用标准 Reference Standard	GB 10190(IEC60384-16)	
气候类别 Climatic Category	55/100/56	
额定温度 Rated Temperature	85℃	
工作温度范围 Operating Temperatur Range	-55℃~100℃	
额定电压 Rated Voltage	250V, 400V, 630V; 1000V, 1250V (according to requested)	
电容量范围 Capacitance Range	0.001 μF~30μF	
电容量偏差 Capacitance Tolerance	±5%(J), ±10%(K)	
耐电压 Voltage Proof	1.6UR(5s)	
损耗角正切 Dissipation Factor	≤10×10 ⁻⁴ (1kHz, 20℃)	
绝缘电阻 Insulation Resistance	≥50 000MΩ, C _R ≤0.33μF	(20℃, 100V, 1min)
	≥15 000s, C _R >0.33μF	

■ 外形尺寸 Dimensions (mm)

Dmax	Dmax < 7	Dmax ≥ 7
d ± 0.05	0.6	0.8

Cap. (uF)	160/250VDC		400VDC		630VDC	
	Dmax	Lmax	Dmax	Lmax	Dmax	Lmax
0.001					5	13
0.0015					5	13
0.0022					5	13
0.0033					5	13
0.0047					5	13
0.0068			5	13	6	16.5
0.01	5	13	6	16.5	6.5	16.5
0.015	5	13	6	16.5	7.5	16.5
0.022	6	16.5	6.5	16.5	8.5	16.5
0.033	6	16.5	7	16.5	8.5	20.5
0.047	6.5	16.5	8	16.5	9.5	20.5
0.068	7.5	16.5	8	20.5	9	28
0.1	8.5	16.5	9	20.5	10	28
0.15	8.5	20.5	8.5	28	12	28
0.22	9.5	20.5	10	28	13	33
0.33	9	28	11.5	28	15.5	33
0.47	10.5	28	13	28	18	33
0.68	12	28	14.5	33	21	33
1	13	33	17	33		
1.5	15.5	33	20	33		
2.2	18	33				
3.3	21.5	33				

Or produced and tested by clients' requirement