

CBB22 (Box type Metallized Polypropylene Film Capacitor)

Outline Drawing


Are non-inductively wound with metallized polypropylene film as the dielectric/electrode with copper-clad steel leads and encapsulated in a plastic case sealed with epoxy resin.

Features

- Box type provides the identical outer appearance
- Very low loss at high frequency, suitable for high current
- High insulation resistance, long life due to self-healing effect
- Widely used in high frequency, DC, AC and pulse circuits

Specifications

Temperature	-40°C to +85°C	
Rated Voltage	100/160V, 250V, 400V, 630V(DC)	
Capacitance Range	0.0047~6.8uF	
Capacitance Tolerance	±5%(J), ±10%(K)	
Voltage proof	1.6Ur(5s)	
Dissipation Factor	≤0.1% (20°C, 1KHz)	
Insulation Resistance	≥2500MΩ (CR≤0.33uF)	(20°C, 1min)
	≥7500s (CR>0.33uF)	

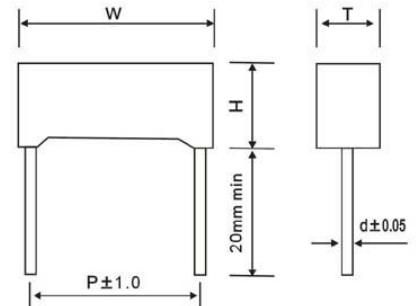

Dimensions

The size of appearance can be customized according to customer's request.