




■ 外形图 Outline Drawing

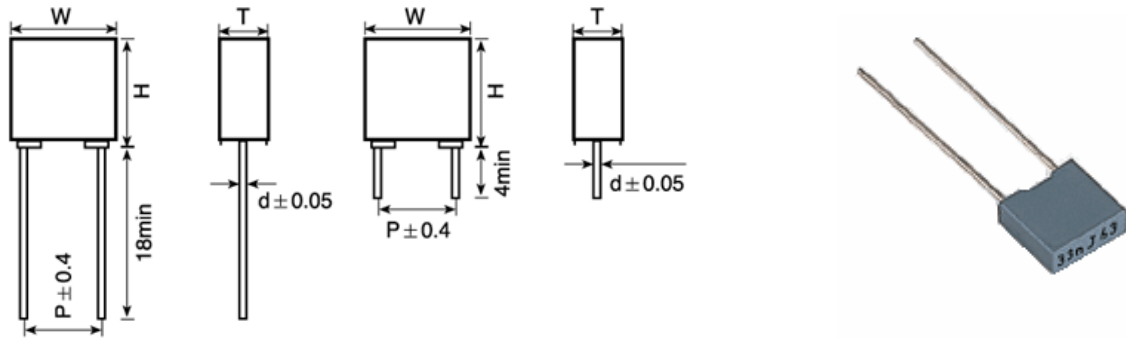

■ 特点

- 可靠性高
- 塑料外壳封装，外观一致性好

■ Features

- High reliability
- Box type provides the identical outer appearance

■ 技术要求 Specifications

引用标准 Reference Standard	GB7332(IEC 60384-2)			
气候类别 Climatic Category	55/100/56			
额定温度 Rated Temperature	85℃			
工作温度范围 Operating Temperature Range	-55℃~105℃ (+85℃ to +105℃: decreasing factor 1.25% per °C for VR(DC))			
额定电压 Rated Voltage	50/63V,100V,250V,400V,500V,630V			
电容量范围 Capacitance Range	0.0033 μF~2.2μF			
电容量偏差 Capacitance Tolerance	±5%(J), ±10%(K), ±20%(M)			
耐电压 Voltage Proof	1.6UR(5s)			
损耗角正切 Dissipation Factor	Frequency	C _R ≤0.1μF	C _R >0.1 μF	
	1kHz	≤1.0%	≤1.0%	
	10kHz	≤1.5%	≤1.5%	
	100kHz	≤3.0%	—	
最大脉冲爬升速率: 若实际工作电压U比额定电压UR低, 电容器可工作在更高的dv/dt场合。这样dv/dt允许值应为右表值乘以UR/U。 Maximum Pulse Rise Time(dv/dt): If the working voltage(U)is lower than the rated voltage(UR),the capacitor can be worked at a higher dv/dt.In this case ,the maximum allowed dv/dt is obtained by multiplying the right value with UR/U	UR(V)	dv/dt(V/us)		
		P=7.5	P=10.0	P=15
	63	5	6	2.5
	100	6	9	3
	160	-	15	9
	250	15	20	12
	400	30	30	20
630	40	40	25	
绝缘电阻 Insulation Resistance	UR>100V	≥30 000MΩ, C _R ≤0.33μF (20℃, 100V, 1min)		
	UR≤100V	≥15 000MΩ, C _R ≤0.33μF		
		≥5 000S, C _R >0.33μF (20℃, 10V, 1min)		

